


Pressure Sensitive Crystal

Composition:

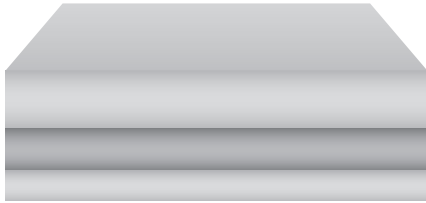

- ← Film Gauge (100mic)
- ← PVC (80mic)
- ← Adhesive (20mic)

Properties		
Section	Unit	Standard Value
Main Characteristic	-	High-scratch resistance
Adhesion	-	2600 RV-4 # 20rpm / 25°C
Maximum Available Width	mm	1040 / 1300 / 1520
Maximum Available Length	m	50 / 100
Indoor Life	years	8 - 10
Outdoor Life	years	2 - 3

Wider widths can be made available on special request.